



# 10cd Low-intensity Obstruction Light

## 115V<sub>AC</sub> ICAO Type A - replacement unit

### CEL-10-115-E27

#### Key features

- Based on LED technology
- Extremely reliable - long lifetime
- Very low power consumption
- 115VAC nominal supply voltage
- Intensity 18cd typical
- Stabilised light output
- Easy to install
- No RF-radiations
- Safe and easy to use

#### Benefits

- Long maintenance intervals
- Low energy cost
- Supply power voltage variations do not affect light output
- Very low total lifetime costs
- Comes with five (5) years warranty

#### Specifications met

- ICAO International Standards and Recommended Practices: Aerodromes - Annex 14 Volume 1, 5th Edition, July 2009, Chapter 6: Low-intensity, Type A Fixed Obstacle Light

#### Optical characteristics

- Intensity better than 10cd
- Colour aviation red
- Horizontal radiation pattern 360°
- Vertical radiation pattern 50°
- LED supply current stabilised by constant current generator
- Light output degradation less than 30% after 100,000hrs of operation


#### Electrical characteristics

- LEDs in several separate groups
- Nominal operating voltage 115V<sub>AC</sub>
- Power consumption less than 9VA
- Operating voltage range 105 to 140V<sub>AC</sub>
- Internal 115V<sub>AC</sub> / 48V<sub>DC</sub> power supply
- Two-stage over-voltage protection

#### Mechanical characteristics

- Yellow ABS+PC body
- Ingress protection IP30
- Operating temperature range -55°C to +55°C
- Height 100mm, diameter 92mm, weight 0,4kg

**Order Code: CEL-10-115-E27**

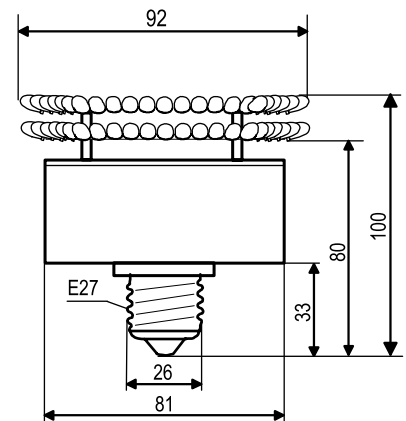

**CEL-10-115-E27**



T: +44 (0)20 8540 1034  
F: +44 (0)20 8543 3058  
E: info@contarnex.com

Contarnex Europe Limited  
252 Martin Way,  
Morden, Surrey SM4 4AW  
United Kingdom

